



### Features:

- -55°C to 125°C operating temperature range
- EIA sizes 0402, 0603, 0805, 1206, 1210 and 1812
- Capacitance offering from 100 pF to 47 uF
- 100% RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant



### Construction

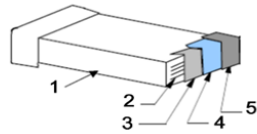

- 1 - Ceramic layers (dielectric)
- 2 - Inner electrodes
- 3 - Base termination
- 4 - Nickel plating layer
- 5 - Tin plating layer

### Electrical Specifications

Type/Code	Dielectric Code	Standard Tolerance		Capacitance Range				
		Code	Description	10V	16V	25V	50V	100V
CML0402	X7R	K	± 10%	120 pF - 0.039 uF			-	
				0.012 uF - 0.1 uF			-	
CML0603	X7R	K	± 10%	150 pF - 0.1 uF			-	
				0.012 uF - 0.18 uF			-	
				0.12 uF - 0.33 uF			-	
CML0805	X7R	K	± 10%	150 pF - 0.1 uF			-	
				0.12 uF - 0.39 uF			-	
				0.12 uF - 2.2 uF			-	
CML1206	X7R	K	± 10%	150 pF - 1 uF			-	
				2.2 uF - 4.7 uF			-	
CML1210	X7R	K	± 10%	-			150 pF - 2.2 uF	
				220 pF - 10 uF			-	
				47 uF			-	
CML1812	X7R	K	± 10%	-			270 pF - 1 uF	
				470 pF - 4.7 uF			-	
				6.8 uF			-	

Note: J = 5% tolerance may be available

### How to Order

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	M	L	0	4	0	2	X	7	R	1	0	3	K	T	5	0	V


Product Series		Size	Dielectric	Capacitance Range		Tolerance (*)		Packaging				Max Working Voltage
Code	Description	Code	Code	0.1 pF to 0.10 uF (E12)		Code	Description	Code	Description	Size	Quantity	
CML	Multilayer Ceramic	0402	X7R	EIA Code	Capacitance	J	± 5%	T	7" Paper Reel	Refer to Packaging Specifications		10V
		0603		101	100 pF	K	± 10%		7" Plastic Tape			16V
		0805		102	1000 pF							25V
		1206		103	0.01 uF							50V
		1210		104	0.1 uF							100V
		1812		105	1 uF							
				106	10 uF							

(\*) Other tolerances may be available. Contact Stackpole.

**Capacitance and Voltage Available**

Dielectric		X7R																											
EIA Code	Size	0402				0603				0805				1206				1210				1812							
	VDCW	10V	16V	25V	50V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	10V	16V	25V	50V	100V	16V	25V	50V	100V
101	100 pF																												
121	120 pF																												
151	150 pF																												
181	180 pF																												
201	200 pF																												
221	220 pF																												
271	270 pF																												
331	330 pF																												
391	390 pF																												
471	470 pF																												
561	560 pF																												
681	680 pF																												
751	750 pF																												
821	820 pF																												
102	1000 pF																												
122	1200 pF																												
152	1500 pF																												
182	1800 pF																												
222	2200 pF																												
272	2700 pF																												
332	3300 pF																												
392	3900 pF																												
472	4700 pF																												
562	5600 pF																												
682	6800 pF																												
822	8200 pF																												
103	0.01 uF																												
123	0.012 uF																												
153	0.015 uF																												
183	0.018 uF																												
223	0.022 uF																												
273	0.027 uF																												
333	0.033 uF																												
393	0.039 uF																												
473	0.047 uF																												
563	0.056 uF																												
683	0.068 uF																												
823	0.082 uF																												
104	0.1 uF																												
124	0.12 uF																												
154	0.15 uF																												
184	0.18 uF																												
224	0.22 uF																												
274	0.27 uF																												
334	0.33 uF																												
394	0.39 uF																												
474	0.47 uF																												
564	0.56 uF																												
684	0.68 uF																												
824	0.82 uF																												
105	1 uF																												
125	1.2 uF																												
155	1.5 uF																												
225	2.2 uF																												
335	3.3 uF																												
475	4.7 uF																												
685	6.8 uF																												
106	10 uF																												
226	22 uF																												
476	47 uF																												

**Mechanical Specifications and Packaging Specifications**

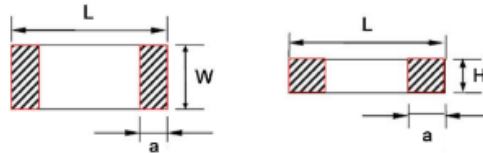


Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0402X7R	10V - 50V	100 pF - 0.47 uF	0.039 ± 0.008 1.00 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.002 0.50 ± 0.05	0.010 ± 0.004 0.25 ± 0.10	inches mm	10000	-
CML0603X7R	10V - 100V	150 pF - 2.2 uF	0.063 ± 0.008 1.60 ± 0.20	0.031 ± 0.008 0.80 ± 0.20	0.031 ± 0.006 0.80 ± 0.15	0.016 ± 0.008 0.40 ± 0.20	inches mm	4000	-
CML0805X7R	10V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
	16V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
	25V	3.3 uF - 10 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
		150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000
3.3 uF - 4.7 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	2000		

**Mechanical Specifications and Packaging Specifications (cont.)**

Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML0805X7R	50V	150 pF - 0.33 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.47 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.56 uF - 0.68 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		0.82 uF - 1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.039 ± 0.004 1.00 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
		1.5 uF - 2.2 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	100V	100 pF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.028 ± 0.020 0.70 ± 0.50	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		150 pF - 0.047 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.031 ± 0.004 0.80 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	4000	-
		0.056 uF - 0.1 uF	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.008 1.25 ± 0.20	0.047 ± 0.004 1.20 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	inches mm	-	3000
	CML1206X7R	10V	200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000
0.47 uF - 0.68 uF			0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
0.82 uF - 1.5 uF			0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
2.2 uF			0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
3.3 uF			0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
4.7 uF - 22 uF			0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
16V - 25V		200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF - 10 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
50V		200 pF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.47 uF - 0.68 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.82 uF - 1.5 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		3.3 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
100V		150 pF - 0.056 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.031 ± 0.004 0.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	4000	-
		0.068 uF - 0.33 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	3000
		0.47 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.012 1.60 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000


**Mechanical Specifications and Packaging Specifications (cont.)**

Type/Code	Voltage	Capacitance Range	L	W	H	a	Unit	Packaging (7" Reel) Qty.	
								Paper Tape	Plastic Tape
CML1210X7R	10V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	16V - 25V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	50V	220 pF - 0.47 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.047 ± 0.004 1.20 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.68 uF - 1 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		4.7 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		10 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.098 ± 0.010 2.50 ± 0.25	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500
	100V	150 pF - 0.22 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.055 ± 0.004 1.40 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
		0.33 uF - 2.2 uF	0.126 ± 0.012 3.20 ± 0.30	0.098 ± 0.012 2.50 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	2000
CML1812X7R	16V - 25V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 6.8 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	50V	470 pF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		1.5 uF - 4.7 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.071 ± 0.004 1.80 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
	100V	270 pF - 0.56 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.004 1.60 ± 0.10	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	1000
		0.68 uF - 1 uF	0.177 ± 0.016 4.50 ± 0.40	0.126 ± 0.012 3.20 ± 0.30	0.063 ± 0.009 1.60 ± 0.24	0.024 ± 0.012 0.60 ± 0.30	inches mm	-	500

Environmental Characteristics										
Test	Test Specification					Test Condition				
Capacitance	Should be within the specified tolerance.					X7R: (Class II) Cap ≤ 10uF 1.0 ± 0.2 Vrms, 1 KHz ± 10% Cap > 10uF 0.5 ± 0.1 Vrms, 120 Hz ± 10%				
Dissipation Factor (DF)	X7R (Class II)	X7R (≥ 0402)	≥ 50V	25V	16V	10V				
			≤ 2.5%	≤ 3.5% (C < 0.47uF) ≤ 10.0% (C ≥ 0.47uF)	≤ 5% (C < 0.15uF) ≤ 10.0% (C ≥ 0.15 uF)					
Insulation Resistance	X7R (Class II)	C ≤ 25nF, Ri ≥ 10000M Ω C > 25nF, Ri*CR > 100S				Measuring Voltage: Rated Voltage (Max 500V) Duration: 60 ± 5 seconds Test Humidity: ≤ 75% Test Temperature: 25°C ± 5°C Test Current: ≤ 50 mA				
Dielectric Withstanding Voltage	No breakdown or damage.					Measuring voltage: Class II: 250% rated voltage Duration: 1 ~ 5 seconds Charge/Discharge Current: 50 mA max.				
Solderability	At least 95% of the terminal electrode is covered by new solder. Visual appearance: No visible damage.					Preheating Conditions: 80°C to 120°C, 10 ~ 30 seconds Solder Temperature: 235°C ± 5% (Sn/Pb: 63/37) Duration: 2 ± 0.5 seconds				
						Solder Temperature: 245°C ± 5°C (Lead-free) Duration: 2 ± 0.5 seconds				
Resistance to Soldering Heat	Item	X7R				Preheating Conditions: 100°C to 200°C; 10 ± 2 minutes Solder Temperature: 265°C ± 5°C Duration: 10 ± 1 seconds Clean the capacitor with solvent and examine it with a 10X (min.) microscope. Recovery Time: 24 ± 2 hours Recovery Condition: Room temperature.				
	Δ C/C	-5 ~ + 10%								
	DF	Same to initial value								
	IR	Same to initial value								
	Appearance: No visible damage. At least 95% of the terminal electrode is covered by new solder.									
Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage. Δ C/C: ≤ ± 10%					Test Board: Al2O3 or PCB Warp: 1 mm Speed: 0.5 mm / second The measurement should be made with the board in the bending position. Unit: mm 				
Termination Adhesion	No visible damage					Applied Force: 5 N Duration: 10 ± 1 seconds				
Temperature Cycle	X7R: Δ C/C: ≤ ± 10%					Preheating Conditions: up-category temperature 1 hour Recovery Time: 24 ± 1 hours Initial Measurement				
						Cycling times: 5 times, 1 cycle, 4 steps:				
						Step	Temp. (°C)	Time (min.)		
						1	Low-category temp. X7R: -55°C	30 ± 3		
						2	Normal temp. (+20°C)	2 - 3		
3	Up-category temp. X7R: +125°C	30 ± 3								
4	Normal temp. (+20°C)	2 - 3								
Recovery time after test: 24 ± 2 hours										


Environmental Characteristics (cont.)		
Test	Test Specification	Test Condition
Moisture Resistance	X7R: $\Delta C/C: \leq \pm 10\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 1000M \Omega$ or $R_i^*CR \geq 25S$ whichever is smaller Appearance: No visible damage	Temperature: $40^\circ C \pm 2^\circ C$ Humidity: 90 ~ 95% R.H. Duration: 500 hours Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i^*CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Low-voltage ( $< 100V$ ) Applied Voltage: 1.5 x rated voltage Duration: 1000 hours Temperature: $125^\circ C$ (X7R) Charge/Discharge Current: 50 mA max. Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)
Middle and High Voltage Life Test	X7R: $\Delta C/C: \leq \pm 20\%$ DF: Not more than twice of initial value. IR: X7R: $R_i \geq 2000M \Omega$ or $R_i^*CR \geq 50 S$ whichever is smaller Appearance: No visible damage	Applied voltage: $100V \leq$ rated voltage $< 500V$ : 2 multiple $500V \leq$ rated voltage $\leq 1000V$ : 1.5 multiple $> 1000V$ rated voltage: 1.2 multiple Duration: 1000 hours Charge/Discharge Current: 50 mA max. Temperature: $125^\circ C$ (X7R) Recovery Conditions: Room temperature Recovery Time: 48 hours (Class II)

### Reel Specifications

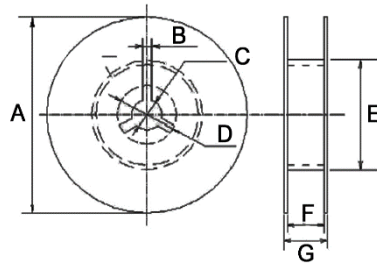

Type/Code	A	B	C	D	E	F	G	Unit
CML_X7R (all sizes)	$7.008 \pm 0.079$ $178.00 \pm 2.00$	0.118 3.00	$0.512 \pm 0.020$ $13.00 \pm 0.50$	$0.827 \pm 0.031$ $21.00 \pm 0.80$	1.969 or more 50.00 or more	$0.394 \pm 0.059$ $10.00 \pm 1.50$	0.472 max 12.00 max	inches mm

### Paper Tape Specifications

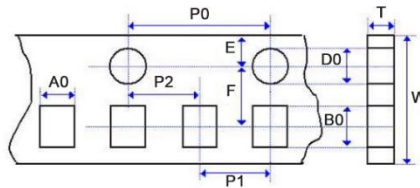


Type/Code	A0	B0	T	W	P0	Unit
CML0402X7R	$0.026 \pm 0.004$ $0.65 \pm 0.10$	$0.045 \pm 0.004$ $1.15 \pm 0.10$	0.031 below 0.80 below	$0.315 \pm 0.004$ $8.00 \pm 0.10$	$0.157 \pm 0.004$ $4.00 \pm 0.10$	inches mm
CML0603X7R	$0.043 \pm 0.004$ $1.10 \pm 0.10$	$0.075 \pm 0.004$ $1.90 \pm 0.10$	0.043 max 1.10 max	$0.315 \pm 0.004$ $8.00 \pm 0.10$	$0.157 \pm 0.004$ $4.00 \pm 0.10$	inches mm
CML0805X7R	$0.057 \pm 0.006$ $1.45 \pm 0.15$	$0.091 \pm 0.006$ $2.30 \pm 0.15$	0.043 max 1.10 max	$0.315 \pm 0.006$ $8.00 \pm 0.15$	$0.157 \pm 0.004$ $4.00 \pm 0.10$	inches mm
CML1206X7R	$0.071 \pm 0.008$ $1.80 \pm 0.20$	$0.134 \pm 0.008$ $3.40 \pm 0.20$	0.043 max 1.10 max	$0.315 \pm 0.008$ $8.00 \pm 0.20$	$0.157 \pm 0.004$ $4.00 \pm 0.10$	inches mm

**Paper Tape Specifications (cont.)**

Type/Code	P1	P2	D0	E	F	Unit
CML0402X7R	0.079 ± 0.002 2.00 ± 0.05	0.079 ± 0.002 2.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0603X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.002 4.00 ± 0.05	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML0805X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.002 1.75 ± 0.05	0.138 ± 0.002 3.50 ± 0.05	inches mm
CML1206X7R	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm

**Plastic Tape Specifications**

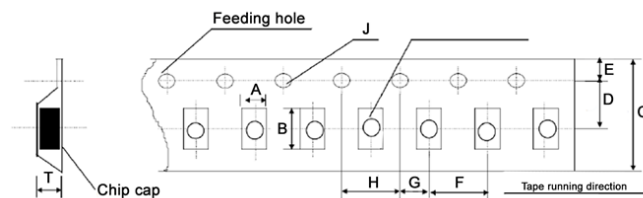

Type/Code	A	B	C	D	E	Unit
CML0805X7R	0.061 ± 0.008 1.55 ± 0.20	0.093 ± 0.008 2.35 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1206X7R	0.077 ± 0.008 1.95 ± 0.20	0.142 ± 0.008 3.60 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1210X7R	0.106 ± 0.004 2.70 ± 0.10	0.135 ± 0.004 3.42 ± 0.10	0.315 ± 0.004 8.00 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
CML1812X7R	0.144 ± 0.004 3.66 ± 0.10	0.195 ± 0.004 4.95 ± 0.10	0.472 ± 0.004 12.00 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.069 ± 0.004 1.75 ± 0.10	inches mm
Type/Code	F	G	H	J	T	Unit
CML0805X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.059 max 1.50 max	inches mm
CML1206X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.073 max 1.85 max	inches mm
CML1210X7R	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.126 max 3.20 max	inches mm
CML1812X7R	0.315 ± 0.004 8.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	0.059-0/+0.004 1.5-0/+0.10	0.157 max 4.00 max	inches mm

**RoHS Compliance**

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

**RoHS Compliance Status**

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/MM)
CML	Multilayer Ceramic Chip Capacitor	SMD	YES	100% Matte Sn over Ni	Always	Always



### “Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

### Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

### Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.