

Features:


- High current handling up to 70.7 Amps
- Low resistance/inductance
- Inner terminations engineered to deter sulfur contamination
- AEC-Q200 qualified
- RoHS compliant and lead free without exemption
- Halogen free
- REACH compliant




Electrical Specifications					
Type/Code	Power Rating (W) @ 70°C	Max Current Rating (A)	Max Overload Current (A)	Operating Temperature Range	Maximum Resistance Value (Ω)
CSFA0201	0.1	5.8	14.5	-55°C to +155°C	≤ 0.003
CSFA0402	0.125	6.5	16.2		≤ 0.003
CSFA0603	0.25	22.4	56.0		≤ 0.0005
CSFA0805	0.5	31.6	79.0		≤ 0.0005
CSFA1206	0.75	38.7	96.7		≤ 0.0005
CSFA2010	1	70.7	112.0		≤ 0.0002
CSFA2512	2	63.2	158.0		≤ 0.0005

Mechanical Specifications					
Type/Code	L	W	H	T	Unit
CSFA0201	0.024 ± 0.001	0.012 ± 0.001	0.010 ± 0.002	0.006 ± 0.002	inches
	0.60 ± 0.03	0.30 ± 0.03	0.26 ± 0.05	0.15 ± 0.05	mm
CSFA0402	0.039 ± 0.004	0.020 ± 0.002	0.016 ± 0.002	0.012 ± 0.004	inches
	1.00 ± 0.10	0.50 ± 0.05	0.40 ± 0.05	0.30 ± 0.10	mm
CSFA0603	0.061 ± 0.004	0.031 ± 0.004	0.022 ± 0.004	0.014 ± 0.008	inches
	1.55 ± 0.10	0.80 ± 0.10	0.55 ± 0.10	0.35 ± 0.20	mm
CSFA0805	0.083 ± 0.006	0.053 ± 0.006	0.028 ± 0.004	0.022 ± 0.008	inches
	2.10 ± 0.15	1.35 ± 0.15	0.70 ± 0.10	0.55 ± 0.20	mm
CSFA1206	0.122 ± 0.008	0.061 ± 0.004	0.028 ± 0.004	0.031 ± 0.008	inches
	3.10 ± 0.20	1.55 ± 0.10	0.70 ± 0.10	0.80 ± 0.20	mm
CSFA2010	0.200 ± 0.010	0.100 ± 0.010	0.026 ± 0.008	0.083 ± 0.012	inches
	5.08 ± 0.25	2.54 ± 0.25	0.65 ± 0.20	2.10 ± 0.30	mm
CSFA2512	0.252 ± 0.012	0.126 ± 0.012	0.026 ± 0.008	0.037 ± 0.012	inches
	6.40 ± 0.30	3.20 ± 0.30	0.65 ± 0.20	0.95 ± 0.30	mm


Note: Sizes 0201 and 0402 have no marking.

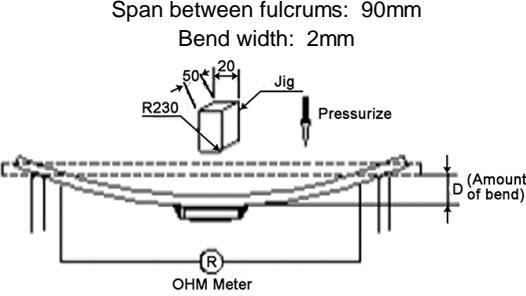Performance Characteristics (per JIS-C 5201)		
Test	Test Condition	Test Specification
Short Time Overload	2.5 times rated current for 5 seconds, for all sizes except 2010. For 2010 size, 2.5 times rated power for 5 seconds	≤ Rmax
High Temperature Exposure	1000 hours at 155°C ± 2°C	≤ Rmax
Low Temperature Storage	1000 hours at -55°C ± 2°C	≤ Rmax
Soldering Heat	260 ± 5°C for 10 ± 1 seconds	≤ Rmax
Moisture Load Life	T = 40 ± 2°C, RH = 90~95% Load with Rated Current 1.5 hours "ON", 0.5 hour "OFF", 1000 hours	≤ Rmax
Temperature Cycling	-55°C to +155°C, 100 cycles	≤ Rmax
Load Life	T = 70 ± 2°C, Load with Rated Current 1.5 hours "ON", 0.5 hour "OFF", 1000 hours	≤ Rmax
Solderability	245°C ± 5°C for 3 ± 0.5 seconds	Covered area > 95%
Mechanical Shock	a = 50G, t = 11 ms, 5 times shock	≤ Rmax
Substrate Bending	Span between fulcrums: 90mm Bend width: 2mm 	≤ Rmax
Sulfur Test (FOS)	Per ANSI / EIA-977 105°C ± 2°C, no power rating for 1000 hours	≤ Rmax + 0.1mΩ

Power Derating Curve:

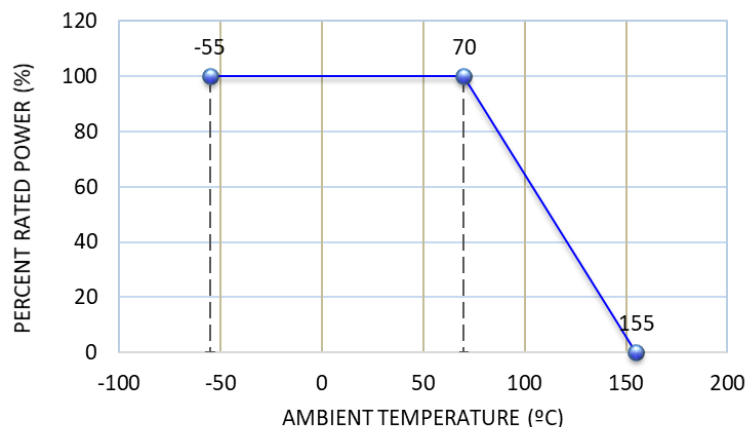


Recommended Pad Layout




Type/Code	a	b	i	Unit
CSFA0201	0.012	0.014	0.010	inches
	0.30	0.35	0.25	mm
CSFA0402	0.020	0.024	0.016	inches
	0.50	0.60	0.40	mm
CSFA0603	0.051	0.036	0.024	inches
	1.30	0.92	0.60	mm
CSFA0805	0.055	0.057	0.031	inches
	1.40	1.44	0.80	mm
CSFA1206	0.071	0.072	0.047	inches
	1.80	1.84	1.20	mm
CSFA2010	0.144	0.113	0.028	inches
	3.65	2.88	0.70	mm
CSFA2512	0.083	0.134	0.150	inches
	2.10	3.40	3.80	mm

Wave Solder Temperature Condition

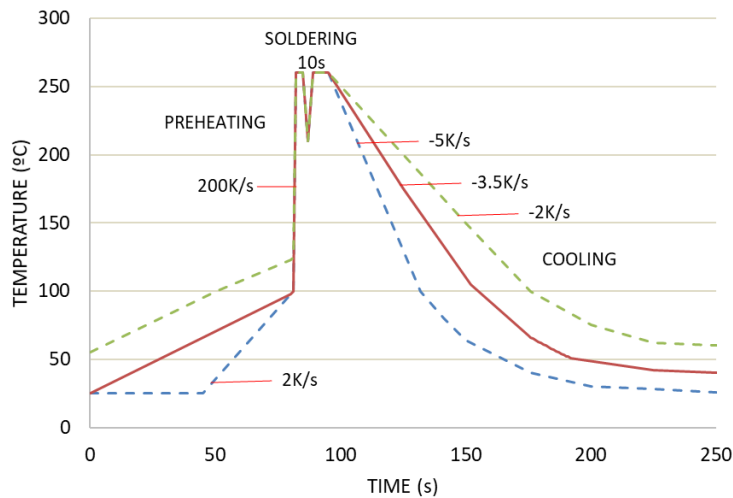

Preheating	100°C ~ 130°C, max. 100 seconds
Soldering	250°C ~ 265°C, max. 10 seconds
Maximum Temperature	260°C ± 5°C, max. 10 seconds

Solder Reflow Temperature Condition

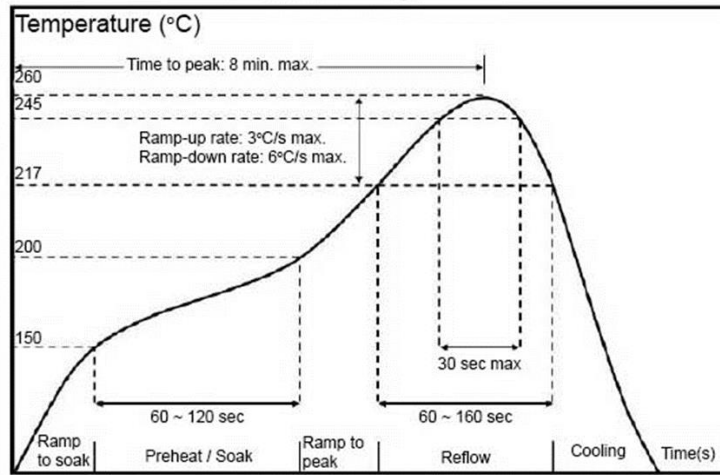


Rework temperature (hot air equipment): 350°C, 3~5 seconds

Recommended reflow methods:


- IR, vapor phase oven, hot air oven
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Packaging Specifications

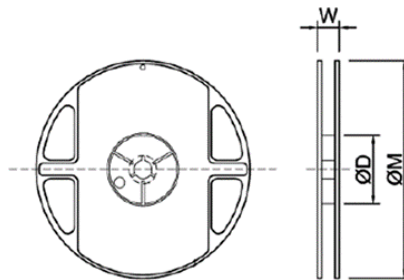


Type/Code	ØD	W	ØM	Unit
All sizes except 2010 and 2512	2.362 ± 0.079	0.354 ± 0.039	7.008 ± 0.197	inches
	60.00 ± 2.00	9.00 ± 1.00	178.00 ± 5.00	mm
Sizes 2010 and 2512	2.362 ± 0.079	0.512 ± 0.039	7.008 ± 0.197	inches
	60.00 ± 2.00	13.00 ± 1.00	178.00 ± 5.00	mm

Taping Specifications – Paper Tape

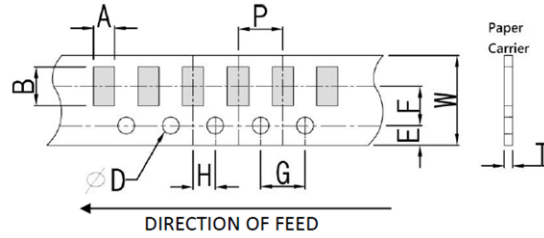

Type/Code	A	B	E	F	W	Unit
CSFA0201	0.018 ± 0.004	0.030 ± 0.004	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.004 3.50 ± 0.10	0.315 ± 0.012 8.00 ± 0.30	inches
	0.45 ± 0.10	0.75 ± 0.10				mm
CSFA0402	0.028 ± 0.002	0.047 ± 0.002				mm
	0.70 ± 0.05	1.20 ± 0.05				mm
CSFA0603	0.046 ± 0.008	0.078 ± 0.008				mm
	1.18 ± 0.20	1.98 ± 0.20				mm
CSFA0805	0.066 ± 0.008	0.094 ± 0.008	mm			
	1.68 ± 0.20	2.38 ± 0.20	mm			
CSFA1206	0.081 ± 0.008	0.144 ± 0.008	mm			
	2.05 ± 0.20	3.65 ± 0.20	mm			
Type/Code	T	P	H	Ø D	G	Unit
CSFA0201	0.014 ± 0.004	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	0.059 +0.004/-0.00 1.50 +0.10/-0.00	0.157 ± 0.004 4.00 ± 0.10	inches
	0.35 ± 0.10					mm
CSFA0402	0.018 ± 0.004					mm
	0.45 ± 0.10					mm
CSFA0603	0.030 ± 0.008					mm
	0.75 ± 0.20					mm
CSFA0805	0.034 ± 0.008	mm				
	0.87 ± 0.20	mm				
CSFA1206	0.034 ± 0.008	mm				
	0.87 ± 0.20	mm				

Taping Specifications – Embossed Plastic Tape

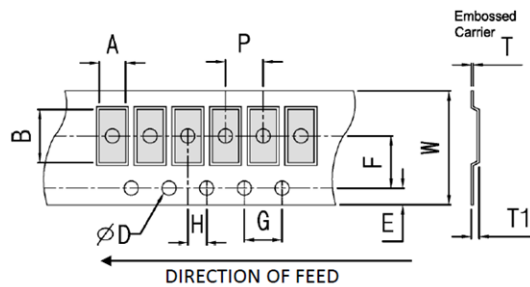

Type/Code	W	P	E	F	ØD	G	Unit
CSFA2010	0.472 ± 0.012	0.157 ± 0.004	0.069 ± 0.004	0.217 ± 0.004	0.059 +0.004/-0.00	0.157 ± 0.004	inches
	12.00 ± 0.30	4.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.10	1.50 +0.10/-0.00	4.00 ± 0.10	mm
CSFA2512	0.472 ± 0.012	0.157 ± 0.004	0.069 ± 0.004	0.217 ± 0.004	0.059 +0.004/-0.00	0.157 ± 0.004	inches
	12.00 ± 0.30	4.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.10	1.50 +0.10/-0.00	4.00 ± 0.10	mm
Type/Code	H	A	B	T1	T	Unit	
CSFA2010	0.079 ± 0.004	0.112 ± 0.008	0.215 ± 0.008	0.031 ± 0.008	0.010 ± 0.004	inches	
	2.00 ± 0.10	2.85 ± 0.20	5.45 ± 0.20	0.80 ± 0.20	0.25 ± 0.10	mm	
CSFA2512	0.079 ± 0.004	0.134 ± 0.008	0.266 ± 0.008	0.031 ± 0.008	0.010 ± 0.004	inches	
	2.00 ± 0.10	3.40 ± 0.20	6.75 ± 0.20	0.80 ± 0.20	0.25 ± 0.10	mm	

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CSFA	Automotive Grade High Current Jumper	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

C	S	F	A	2	0	1	0	Z	T	0	R	0	0
----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

Product Series		Size			Tolerance				Packaging				Resistance Value
Code	Description	Size/Code	Power (W)	Max. Rating Current (A)	Code	Tol	Size	Value (Ω)	Code	Description	Size	Quantity	Four characters with the multiplier used as the decimal holder. 0 ohm = 0R00
CSFA	Automotive Grade High Current Jumper	0201	0.1	5.8	Z	Zero Ohm	0201	0.003 Max	T	Paper Tape	0201, 0402	10000	
		0402	0.125	6.5			0603, 0805, 1206				5000		
		0603	0.25	22.4			0603	0.0005 Max		Embossed Plastic	2010, 2512	4000	
		0805	0.5	31.6			0805						
		1206	0.75	38.7			1206	0.0002 Max					
		2010	1	70.7			2010						
		2512	2	63.2			2512	0.0005 Max					