

**Features:**

- Accurate fusibility applicable to safety circuits in a wide range of electronic sets
- Small size and light weight
- Reliability and high quality
- Low temperature coefficient (under  $\pm 600$  ppm/ $^{\circ}$ C)
- RoHS compliant and halogen free
- REACH compliant




Electrical Specifications					
Type/Code	Power Rating @ 70°C (W)	Maximum Working Voltage (V) <sup>(1)</sup>	Fusing Time and Min. Fusing Power	TCR (ppm/ $^{\circ}$ C)	Ohmic Range ( $\Omega$ ) and Tolerance
					1%, 5%
FRC0402	0.063	50	< 30 seconds at 2.5W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1K
FRC0603	0.1	100	< 30 seconds at 3W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K
FRC0805	0.125	150	< 30 seconds at 3.25W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K
FRC1206	0.25	200	< 30 seconds at 5W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K
FRC1210	0.5	250	< 30 seconds at 7.5W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K
FRC2010	0.75	300	< 30 seconds at 11.25W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K
FRC2512	1	400	< 30 seconds at 15W	$\pm 600$	1 - 47
				$\pm 400$	47.5 - 470
				$\pm 200$	475 - 1.8K

(1) Lesser of  $\sqrt{P \cdot R}$  or maximum working voltage.  
Operating Temperature Range: -55°C ~ +155°C  
Contact Stackpole for non-standard parts.

Mechanical Specifications						
Type/Code	L	W	H	l1	l2	Unit
FRC0402	0.039 $\pm$ 0.004	0.020 $\pm$ 0.002	0.012 $\pm$ 0.002	0.006 $\pm$ 0.004	0.008 $\pm$ 0.004	inches
	1.00 $\pm$ 0.10	0.50 $\pm$ 0.05	0.30 $\pm$ 0.05	0.15 $\pm$ 0.10	0.20 $\pm$ 0.10	mm
FRC0603	0.063 $\pm$ 0.008	0.031 $\pm$ 0.006	0.016 $\pm$ 0.004	0.012 $\pm$ 0.008	0.012 $\pm$ 0.004	inches
	1.60 $\pm$ 0.20	0.80 $\pm$ 0.15	0.40 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.10	mm

Mechanical Specifications (cont.)						
Type/Code	L	W	H	I1	I2	Unit
FRC0805	0.079 ± 0.008 2.00 ± 0.20	0.049 ± 0.006 1.25 ± 0.15	0.020 ± 0.006 0.50 ± 0.15	0.012 ± 0.006 0.30 ± 0.15	0.016 ± 0.006 0.40 ± 0.15	inches mm
FRC1206	0.120 ± 0.010 3.05 ± 0.10	0.063 ± 0.010 1.60 ± 0.20	0.022 ± 0.006 0.55 ± 0.15	0.016 ± 0.008 0.40 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	inches mm
FRC1210	0.120 ± 0.004 3.05 ± 0.10	0.098 ± 0.008 2.50 ± 0.20	0.022 ± 0.006 0.55 ± 0.15	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	inches mm
FRC2010	0.197 ± 0.008 5.00 ± 0.20	0.098 ± 0.008 2.50 ± 0.20	0.022 ± 0.004 0.55 ± 0.10	0.024 ± 0.008 0.60 ± 0.20	0.024 ± 0.008 0.60 ± 0.20	inches mm
FRC2512	0.248 ± 0.008 6.30 ± 0.20	0.126 ± 0.008 3.20 ± 0.20	0.022 ± 0.004 0.55 ± 0.10	0.024 ± 0.008 0.60 ± 0.20	0.024 ± 0.008 0.60 ± 0.20	inches mm


Power Derating Curve:

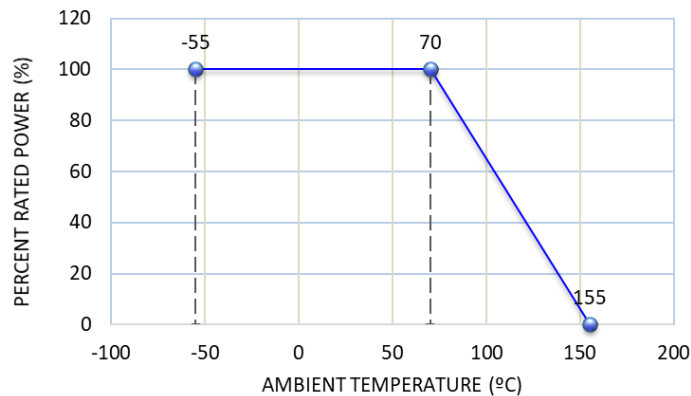

Performance Characteristics			
Test	Test Method	Test Specification	Test Condition
Temperature Coefficient of Resistance (T.C.R.)	JIS C 5201-1 clause 4.8	Refer to Electrical Specification table	- 55°C or + 155°C, 25°C is the reference temperature
Short Time Overload	JIS C 5201-1 clause 4.13	1%: ± (1% + 0.05 Ω) 5%: ± (2% + 0.1 Ω)	General: 2.5 times RCWV or Max. Overload Voltage whichever is less for 5 seconds
Soldering Heat	JIS C 5201-1 clause 4.18	1%: ± (0.5% + 0.05 Ω) 5%: ± (1% + 0.05 Ω)	260°C ± 5°C for 10 seconds
Temperature Cycling	JIS C 5201-1 clause 4.19	1%: ± (0.5% + 0.05 Ω) 5%: ± (1% + 0.1 Ω)	- 55°C to + 155°C, 5 cycles
Resistance to Solvent	JIS C 5201-1 clause 4.29	± (0.5% + 0.05 Ω)	The tested resistor shall be immersed into isopropyl alcohol at 20°C ~ 25°C for 60 seconds. Then the resistor is left in the room for 48 hours.
Load Life in Humidity	JIS C 5201-1 clause 4.24	1%: ± (1% + 0.05 Ω) 5%: ± (2% + 0.05 Ω)	40°C ± 2°C, 90% ~ 95% R.H. RCWV or Max. Working Voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF"
Load Life (Endurance)	JIS C 5201-1 clause 4.25	1%: ± (1% + 0.05 Ω) 5%: ± (3% + 0.1 Ω)	70°C ± 2°C, RCWV or Max. Working Voltage whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hour "OFF"
Insulation Resistance	JIS C 5201-1 clause 4.6	≥ 10 G Ω	100V for 1 minute
Terminal Bending Strength	JIS C 5201-1 clause 4.33	± (1% + 0.05 Ω)	Bending once for 5 seconds. 0402, 0603, 0805 = 5 mm 1206, 1210 = 3 mm 2010, 2512 = 2 mm


Storage conditions: Temperature of 25°C ± 5°C. Humidity: 60% ± 20% R.H..

**Example of Fusing Characteristics**

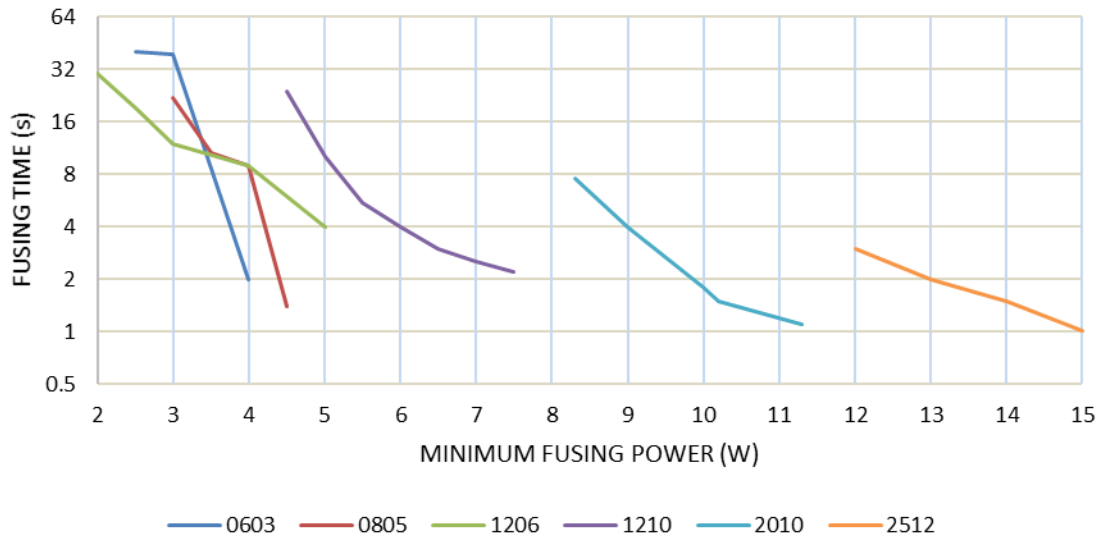


Because fusing time is related to position and mounting of the part, copper in the PCB, solder pad size and solder amount, and other variables, this information is only a reference point. Applications using this and any fusing element should verify if the fusing characteristic is adequate.

**Packaging Specifications**

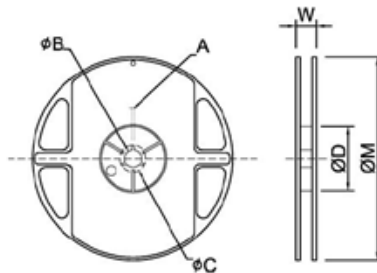


Type/Code	A	B	C	D	W	M	Unit
FRC0402	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.004 11.50 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC0603	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.004 11.50 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC0805	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.004 11.50 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC1206	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.004 11.50 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC1210	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.453 ± 0.004 11.50 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC2010	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.630 ± 0.004 16.00 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm
FRC2512	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.039 13.50 ± 1.00	0.827 ± 0.039 21.00 ± 1.00	2.362 ± 0.039 60.00 ± 1.00	0.630 ± 0.004 16.00 ± 2.00	7.008 ± 0.004 178.00 ± 2.00	inches mm

**Paper Tape Specifications**

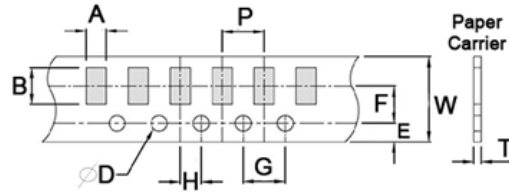

Type/Code	A	B	W	E	F	Unit
FRC0402	0.028 ± 0.004 0.70 ± 0.10	0.047 ± 0.004 1.20 ± 0.10	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
FRC0603	0.041 ± 0.008 1.05 ± 0.20	0.071 ± 0.008 1.80 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
FRC0805	0.061 ± 0.008 1.55 ± 0.20	0.091 ± 0.008 2.30 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
FRC1206	0.075 ± 0.008 1.90 ± 0.20	0.138 ± 0.008 3.50 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
FRC1210	0.112 ± 0.008 2.85 ± 0.20	0.138 ± 0.008 3.50 ± 0.20	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	inches mm
Type/Code	G	H	T	D	P	Unit
FRC0402	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.018 ± 0.004 0.45 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.079 ± 0.004 2.00 ± 0.10	inches mm
FRC0603	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.024 ± 0.004 0.60 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
FRC0805	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004 0.75 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
FRC1206	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004 0.75 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm
FRC1210	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	0.030 ± 0.004 0.75 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	inches mm


**Embossed Tape Specifications**

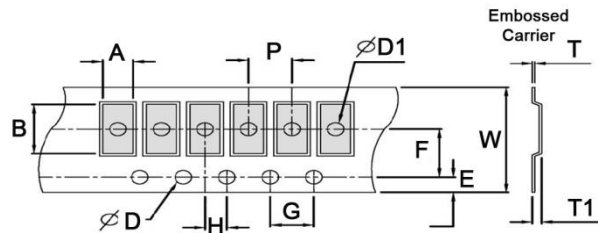

Type/Code	A	B	W	E	F	G	Unit
FRC2010	0.110 ± 0.008 2.80 ± 0.20	0.220 ± 0.008 5.60 ± 0.20	0.472 ± 0.004 12.00 ± 0.10	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	inches mm
FRC2512	0.134 ± 0.008 3.40 ± 0.20	0.264 ± 0.008 6.70 ± 0.20	0.472 ± 0.004 12.00 ± 0.10	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.157 ± 0.004 4.00 ± 0.10	inches mm
Type/Code	H	T	D	D1	T1	P	Unit
FRC2010	0.079 ± 0.002 2.00 ± 0.05	0.009 ± 0.004 0.23 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.033 ± 0.006 0.85 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm
FRC2512	0.079 ± 0.002 2.00 ± 0.05	0.009 ± 0.004 0.23 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.059 ± 0.004 1.50 ± 0.10	0.033 ± 0.006 0.85 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	inches mm


**Peel Force of Top Cover Paper Tape**

The peel force of top cover tape shall be between 10 ~ 70 g.

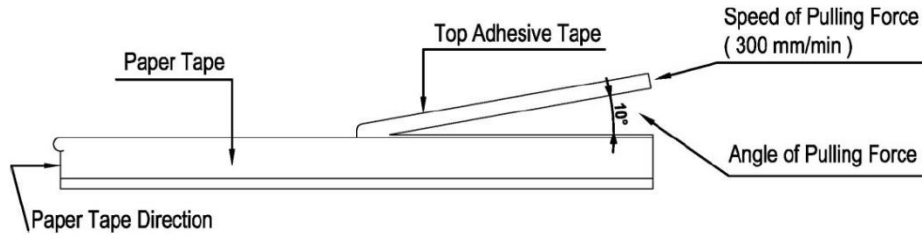

**Recommended Pad Layout**

Type/Code	A	B	C	Unit
FRC0402	0.024	0.063	0.028	inches
	0.60	1.60	0.70	mm
FRC0603	0.031	0.094	0.039	inches
	0.80	2.40	1.00	mm
FRC0805	0.051	0.114	0.057	inches
	1.30	2.90	1.45	mm
FRC1206	0.087	0.165	0.071	inches
	2.20	4.20	1.80	mm
FRC1210	0.079	0.173	0.106	inches
	2.00	4.40	2.70	mm
FRC2010	0.150	0.260	0.106	inches
	3.80	6.60	2.70	mm
FRC2512	0.193	0.319	0.134	inches
	4.90	8.10	3.40	mm

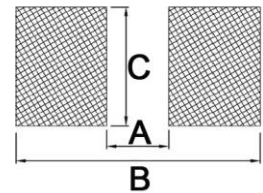

**Part Marking Instructions**



**1% Marking**  
The nominal resistance is marked on the surface of the overcoating with the use of 4 digit markings. 0201 and 0402 are not marked.



**5% Marking**  
The nominal resistance is marked on the surface of the overcoating with the use of 3 digit markings. 0201 and 0402 are not marked.

For shared E24/E96 values, 1% tolerance product may be marked with three-digit marking instead of the standard four-digit marking for all other E96 values. All E24 values available in 1% tolerance are also marked with three-digit marking.

**Marking Instructions for 0603 1% Chip Resistors (per EIA-J)**

A two-digit number is assigned to each standard R-Value (E96) as shown in the chart below. This is followed by one alpha character which is used as a multiplier. Each letter represents a specific multiplier as follows:

Z = 0.01	A = 10	D = 10,000
Y = 0.1	B = 100	E = 100,000
X = 1	C = 1,000	F = 1,000,000

EXAMPLE:

Chip Marking	Explanation	Value
01B	01 means 10.0 and B = 100	10.0 x 100 = 1 Kohm
25C	25 means 17.8 and C = 1,000	17.8 x 1,000 = 17.8 Kohm
93D	93 means 90.9 and D = 10,000	90.9 x 10,000 = 909 Kohm

E96											
#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value
01	10.0	17	14.7	33	21.5	49	31.6	65	46.4	81	68.1
02	10.2	18	15.0	34	22.1	50	32.4	66	47.5	82	69.8
03	10.5	19	15.4	35	22.6	51	33.2	67	48.7	83	71.5
04	10.7	20	15.8	36	23.2	52	34.0	68	49.9	84	73.2
05	11.0	21	16.2	37	23.7	53	34.8	69	51.1	85	75.0
06	11.3	22	16.5	38	24.3	54	35.7	70	52.3	86	76.8
07	11.5	23	16.9	39	24.9	55	36.5	71	53.6	87	78.7
08	11.8	24	17.4	40	25.5	56	37.4	72	54.9	88	80.6
09	12.1	25	17.8	41	26.1	57	38.3	73	56.2	89	82.5
10	12.4	26	18.2	42	26.7	58	39.2	74	57.6	90	84.5
11	12.7	27	18.7	43	27.4	59	40.2	75	59.0	91	86.6
12	13.0	28	19.1	44	28.0	60	41.2	76	60.4	92	88.7
13	13.3	29	19.6	45	28.7	61	42.2	77	61.9	93	90.9
14	13.7	30	20.0	46	29.4	62	43.2	78	63.4	94	93.1
15	14.0	31	20.5	47	30.1	63	44.2	79	64.9	95	95.3
16	14.3	32	21.0	48	30.9	64	45.3	80	66.5	96	97.6

### RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
FRC	Fusible Thick Film Chip Resistor	SMD	YES <sup>(1)</sup>	100% Matte Sn over Ni	Always	Always

Note (1): RoHS Compliant by means of exemption 7c-l.

### “Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

### Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

### Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

## How to Order

